



SPECIFICATIONS (Th=32°C)	CODE #	DESCRIPTION
Heat Transfer Cold side	A	Air cooling
Heat Transfer Warm side	L	Liquid heat removal
Cascade	-	
Cooling Effect	179	179 W at dT=0°C and Th=32°C
Voltage Nominal	24	24 VDC (29,5 VDC MAX)
Current Nominal TE-Module(s)		7,0 A at dT=0°C PE-127-14-15-S (3Sx2P=6X)
Fan(s) Cold side	2	24VDC, 0,19 A, 92x92x25(2x), MTBF 40.000 hrs L10
Fan(s) Warm side	0	None
Thermostat / Regulation & Sensor	0	None
Thermostat Settings	0	None
Trimmable Accuracy & Hysteresis		
Thermostat Position & Casing	0	
Options: Protections	0	None
Rapid Cooling / Economy		None
Weight		4,0 kg net
Overheating Thermostats		75°C±5°C on warm side heat sink surface
Max. operating Temperature		69°C ambient
Enclosed		Cable L= 1500
Packing		Individual cardboard box

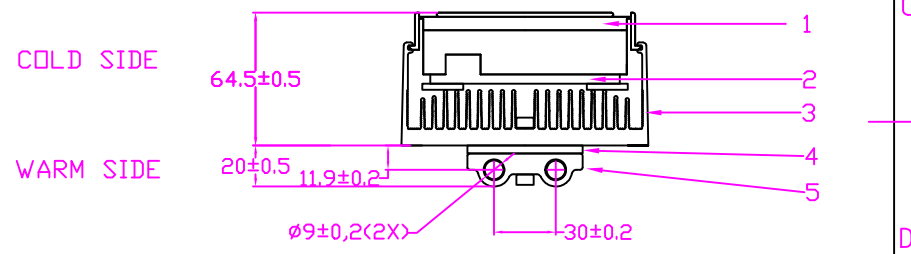

(\* Extra machining for DHT)

POS:	ITEM No.:	DESCRIPTION	QTY	NOTE
1	Finger Guard	Plastics, black	2	
2	Fan	Plastics	2	
3	Heat sink	Anodised Alu, black	1	
4	Seal	Polyethylene, self-adhesive	1	
5	Heat sink	Anodised Alu, silver	1	Turbulators (2x) inserted
6	Connector	± Input terminal (screws) on PC board (warm side)	1	beneath finger guard

Qty/Product:		Material:		Project: Standard	
Designed by: Pavel Cech	Approved by / sign.: Jan Johansson	Customer:	Date/Rev.No: 5-00-04-11	Scale 1	
		Supercool AB Box 27, 40120 Göteborg, Sweden tel: +46 31 420530, fax: +46 31 247909 e-mail: pavel@supercool.se www.supercool.se		<b>COOLING-ASSEMBLY</b> AL-179-24-20-00-00	
		SS-ISO2768-1		Sheet 1/1	